


sappi | Parade Label Pro

One side double coated paper for wet glue labels.

Features

- Glossy top surface
- Calendered
- Reverse side coated
- Excellent print gloss

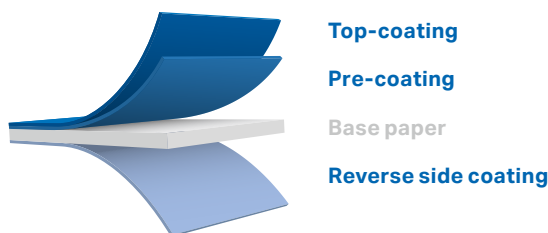

PROPERTY	UNITS	METHODS	TYPICAL VALUES		
BASIS WEIGHTS	g/m ²	ISO 536	80	90	100
THICKNESS	µm	ISO 534	66	75	82
TENSILE STRENGTH MD	N/15mm	ISO 1924-2	68	76	85
TENSILE STRENGTH CD	N/15mm	ISO 1924-2	38	42	48
BRIGHTNESS R457	%	ISO 2470-2	95.5	95.5	95.5
GLOSS	%	TAPPI T480	68	68	68
ROUGHNESS TOP SIDE	µm	ISO 8791-4	0.9	0.9	0.9
OPACITY	%	ISO 2471	85	87	89
COBB (H ₂ O) 60 S REVERSE SIDE	g/m ²	ISO 535	22	22	22

Test climate 23°C, 50 % relative humidity, DIN EN 20 187
All rights to improve quality due to technical modifications reserved

Printing processes

- Offset
- Rotogravure
- Flexo
- Suitable for HP Indigo

Available in

- Reels
- Sheets

Conversion process

- Embossing, lamination, varnishing, hot- & cold foil stamping

Compliance

- Suitable for direct food contact
- Meets the purity requirements of toy safety (heavy metal content)
- Available on request as FSC Mix Credit (FSC™-C015022) or 100% PEFC (PEFC/07-32-76) certified

End uses

- Non-returnable bottles, can and jar labels
- Wrappers

For more information please visit www.sappi.com

This document is for information purposes only. The information given has been prepared to the best of our knowledge i.e., based on due diligence and the state of research at the time of its release date. It does not provide any warranty or guarantee for specific properties or for suitability for a specific purpose or application. The responsibility for testing the suitability of the product for specific applications lies entirely with the purchaser. We reserve our right to change this document at any time.